








# Premier Elite SmartKey User Guide

1. To turn on press  and hold for 4 secs.
  2. To Arm press .
  3. To Part Arm press .
  4. To Disarm press .
  5. To activate Panic Alarm press  and  hold together for 4 secs.
  6. To turn off press  and hold for 4 secs.
- Note: The SmartKey will power off after 20 seconds of no activity.


## ALARM STATUS LED's

- Green LED on = Disarmed
- Orange LED flashing = Part Arming
- Orange LED on = Part Armed
- Red LED flashing = Arming
- Red LED on = Armed
- All 3 LED's flashing together = Alarm
- All 3 LED's cycling = Panic Alarm

## SMARTKEY STATUS LED



- Green LED on = Connection successful
- Red LED on = Connection unsuccessful


Product Type	Frequency Band
GCC1010-3	868.0 - 868.6 MHz
GCC2000-3	433.05 - 434.79 MHz
GCC3000-3	866.0 - 866.6 MHz



## Using the proximity function

The prox function is compatible with all Texecom prox enabled products. The SmartKey function is compatible with all *Ricochet*® enabled systems (excludes Premier Elite iXP-W).


1. The Premier Elite SmartKey prox symbol  must be held over the prox symbol  on the keypad or iProx unit.
2. The Premier Elite SmartKey prox function will normally work at distances of up to 3cm, however it should be noted that distances can and do vary.

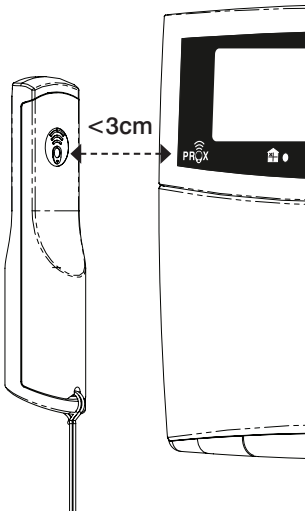

3. Presenting the Premier Elite SmartKey to the keypad is the same as entering a code except that it is a single action as opposed to a multiple action.

4. The control panel will log which user/SmartKey has been presented.

To program the prox function please refer to a prox enabled keypad manual, Premier Elite iProx manual, Premier user guide or the Premier Elite user guide.

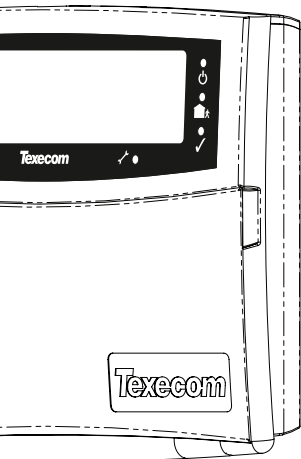


# Battery Information

## Battery Safety

- Replace only with same or equivalent type
- Observe local regulations when disposing of a battery
- Device will transmit low battery warning when battery needs replacing
- Do not throw into a fire
- Do not heat
- Do not charge
- Do not short circuit
- Do not disassemble

**Only replace battery with 3V Lithium CR2**

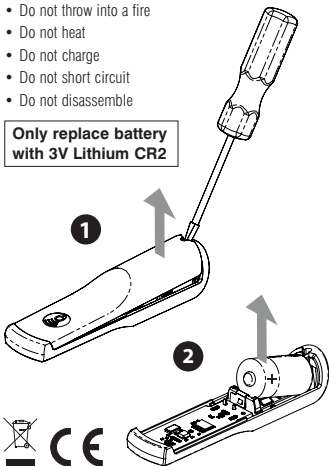

**Standards:** PD6662:2010, EN50131-1:2009, EN50131-3:2009, EN50131-5-3 Grade 2 Class II

**Warranty:** 2 years (excludes battery)

As the Premier Elite SmartKey is not a complete alarm system but only a part thereof, Texecom cannot accept responsibility or liability for any damages whatsoever based on a claim that the Premier Elite SmartKey failed to function correctly. Due to our policy of continuous improvement Texecom reserve the right to change specification without prior notice.

*Ricochet* is a registered trademark. Premier Elite is a trademark of Texecom.

Texecom Ltd © 2015  
BB4 4PW, Made in the UK

**Texecom**